


## Soft starters

Altistart 46 soft start - soft stop units  
Standard duty applications



ATS-46D17N

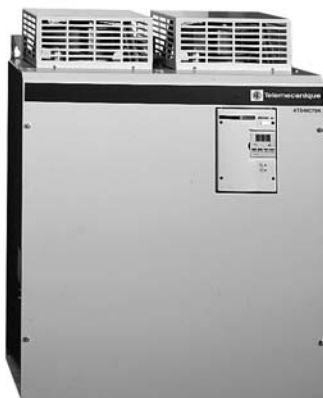

ATS-46C79N


### Power indicated on the motor rating plate in kW

Motor				Starter		Starter reference	Weight kg
230 V	400 V	440 V	500 V	Factory set current A	Rating (starter current limit) A		
kW	kW	kW	kW				
4	7.5	7.5	9	15.2	17	<u>ATS-46D17N</u>	4.100
5.5	11	11	11	21	22	<u>ATS-46D22N</u>	4.100
7.5	15	15	18.5	28	32	<u>ATS-46D32N</u>	4.400
9	18.5	18.5	22	34	38	<u>ATS-46D38N</u>	4.400
11	22	22	30	42	47	<u>ATS-46D47N</u>	6.900
15	30	30	37	54	62	<u>ATS-46D62N</u>	6.900
18.5	37	37	45	68	75	<u>ATS-46D75N</u>	10.700
22	45	45	55	80	88	<u>ATS-46D88N</u>	10.700
30	55	55	75	98	110	<u>ATS-46C11N</u>	11.900
37	75	75	90	128	140	<u>ATS-46C14N</u>	16.000
45	90	90	110	160	170	<u>ATS-46C17N</u>	44.000
55	110	110	132	190	210	<u>ATS-46C21N</u>	44.000
75	132	132	160	236	250	<u>ATS-46C25N</u>	44.000
90	160	160	220	290	320	<u>ATS-46C32N</u>	45.000
110	220	220	250	367	410	<u>ATS-46C41N</u>	56.000
132	250	250	315	430	480	<u>ATS-46C48N</u>	62.000
160	315	355	400	547	590	<u>ATS-46C59N</u>	62.000
–	355	400	–	610	660	<u>ATS-46C66N</u>	62.000
220	400	500	500	725	790	<u>ATS-46C79N</u>	112.000
250	500	630	630	880	1000	<u>ATS-46M10N</u>	124.000
355	630	710	800	1130	1200	<u>ATS-46M12N</u>	124.000

## Soft starters

Altistart 46 soft start - soft stop units  
Standard duty applications

ATS-46D47N

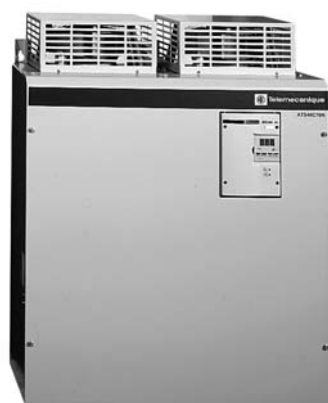

ATS-46C79N

## Power indicated on the motor rating plate in HP

Motor			Starter		Starter reference	Weight
208 V	230 V	460 V	Factory set current	Rating (starter current limit)		
HP	HP	HP	A	A		kg
3	5	10	15.2	17	<u>ATS-46D17N</u>	4.100
5	7.5	15	21	22	<u>ATS-46D22N</u>	4.100
7.5	10	20	28	32	<u>ATS-46D32N</u>	4.400
10	—	25	34	38	<u>ATS-46D38N</u>	4.400
—	15	30	42	47	<u>ATS-46D47N</u>	6.900
15	20	40	54	62	<u>ATS-46D62N</u>	6.900
20	25	50	68	75	<u>ATS-46D75N</u>	10.700
25	30	60	80	88	<u>ATS-46D88N</u>	10.700
30	40	75	98	110	<u>ATS-46C11N</u>	11.900
40	50	100	128	140	<u>ATS-46C14N</u>	16.000
50	60	125	160	170	<u>ATS-46C17N</u>	44.000
60	75	150	190	210	<u>ATS-46C21N</u>	44.000
75	100	200	236	250	<u>ATS-46C25N</u>	44.000
100	125	250	290	320	<u>ATS-46C32N</u>	45.000
125	150	300	367	410	<u>ATS-46C41N</u>	56.000
150	—	350	430	480	<u>ATS-46C48N</u>	62.000
—	200	400	547	590	<u>ATS-46C59N</u>	62.000
200	250	500	610	660	<u>ATS-46C66N</u>	62.000
250	300	600	725	790	<u>ATS-46C79N</u>	112.000
300	350	800	880	1000	<u>ATS-46M10N</u>	124.000
400	450	900	1130	1200	<u>ATS-46M12N</u>	124.000

## Soft starters

Altistart 46 soft start - soft stop units  
Severe duty applications



ATS-46D47N



ATS-46C79N

### Power indicated on the motor rating plate in kW

Motor				Starter		Starter reference	Weight kg
230 V	400 V	440 V	500 V	Factory set current A	Rating (starter current limit) A		
kW	kW	kW	kW	A	A		kg
3	5.5	5.5	7.5	11	12	<u>ATS-46D17N</u>	4.100
4	7.5	7.5	9	15.2	17	<u>ATS-46D22N</u>	4.100
5.5	11	11	11	21	22	<u>ATS-46D32N</u>	4.400
7.5	15	15	18.5	28	32	<u>ATS-46D38N</u>	4.400
9	18.5	18.5	22	34	38	<u>ATS-46D47N</u>	6.900
11	22	22	30	42	47	<u>ATS-46D62N</u>	6.900
15	30	30	37	54	62	<u>ATS-46D75N</u>	10.700
18.5	37	37	45	68	75	<u>ATS-46D88N</u>	10.700
22	45	45	55	80	88	<u>ATS-46C11N</u>	11.900
30	55	55	75	98	110	<u>ATS-46C14N</u>	16.000
37	75	75	90	128	140	<u>ATS-46C17N</u>	44.000
45	90	90	110	160	170	<u>ATS-46C21N</u>	44.000
55	110	110	132	190	210	<u>ATS-46C25N</u>	44.000
75	132	132	160	236	250	<u>ATS-46C32N</u>	45.000
90	160	160	220	290	320	<u>ATS-46C41N</u>	56.000
110	220	220	250	367	410	<u>ATS-46C48N</u>	62.000
132	250	250	315	430	480	<u>ATS-46C59N</u>	62.000
160	315	355	400	547	590	<u>ATS-46C66N</u>	62.000
–	355	400	–	610	660	<u>ATS-46C79N</u>	112.000
220	400	500	500	725	790	<u>ATS-46M10N</u>	124.000
250	500	630	630	880	1000	<u>ATS-46M12N</u>	124.000


## Soft starters

Altistart 46 soft start - soft stop units  
Severe duty applications

ATS-46D47N

## Power indicated on the motor rating plate in HP

Motor			Starter		Starter reference	Weight
208 V	230 V	460 V	Factory set current	Rating (starter current limit)		
HP	HP	HP	A	A		kg
2	–	7.5	11	12	<u>ATS-46D17N</u>	4.100
3	5	10	15.2	17	<u>ATS-46D22N</u>	4.100
5	7.5	15	21	22	<u>ATS-46D32N</u>	4.400
7,5	10	20	28	32	<u>ATS-46D38N</u>	4.400
10	–	25	34	38	<u>ATS-46D47N</u>	6.900
–	15	30	42	47	<u>ATS-46D62N</u>	6.900
15	20	40	54	62	<u>ATS-46D75N</u>	10.700
20	25	50	68	75	<u>ATS-46D88N</u>	10.700
25	30	60	80	88	<u>ATS-46C11N</u>	11.900
30	40	75	98	110	<u>ATS-46C14N</u>	16.000
40	50	100	128	140	<u>ATS-46C17N</u>	44.000
50	60	125	160	170	<u>ATS-46C21N</u>	44.000
60	75	150	190	210	<u>ATS-46C25N</u>	44.000
75	100	200	236	250	<u>ATS-46C32N</u>	45.000
100	125	250	290	320	<u>ATS-46C41N</u>	56.000
125	150	300	367	410	<u>ATS-46C48N</u>	62.000
150	–	350	430	480	<u>ATS-46C59N</u>	62.000
–	200	400	547	590	<u>ATS-46C66N</u>	62.000
200	250	500	610	660	<u>ATS-46C79N</u>	112.000
250	300	600	725	790	<u>ATS-46M10N</u>	124.000
300	350	800	880	1000	<u>ATS-46M12N</u>	124.000

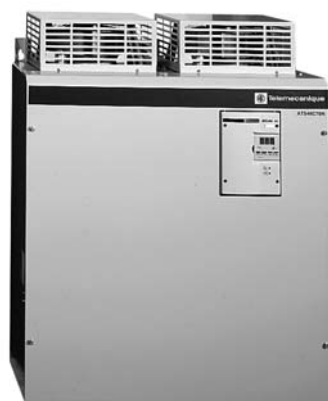

ATS-46C79N