

CA161

Date: February 1, 1999
 Ref: CA161-1.DOC
 Revision: 01
 Author: SM

Cable code	CA161
Description	UniOP Aux port to Interbus-S
Type of Communication	Interbus-S Remote Bus
Panel Connector	Screw terminals (use only the IB-ADP Interbus-S adapter delivered with each TCM04 module)
Notes	Compatible only with panels of type -0045 using TCM04. The IB-ADP adapter contains a jumper that must be set according to the position of the panel in the Interbus-S chain. The jumper has two positions: Set NC when the panel is an intermediate device; Set LC when the panel is the last device. If UniOP is directly connected with IBS Master, pins 5 and 9 on the master side must be shorted.

Table 1. Cable description

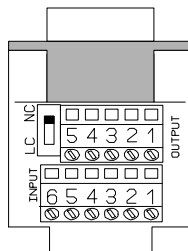
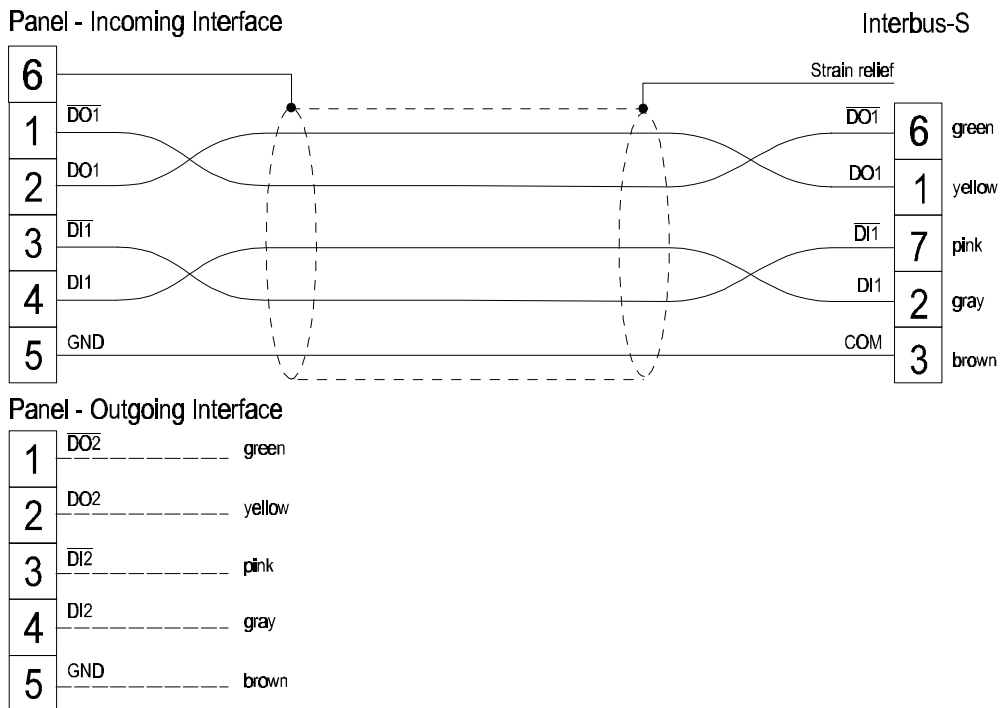


Figure 1 – Connector view (IB-ADP adapter)